

AC-DC 12W


スイッチングACアダプター

<特徴>

軽量コンパクト
 RoHS指令・WEEE指令対応
 過電圧保護回路搭載(OVP)
 低リップル&ノイズ
 100%バーニン試験済



75*47.5*26.5mm

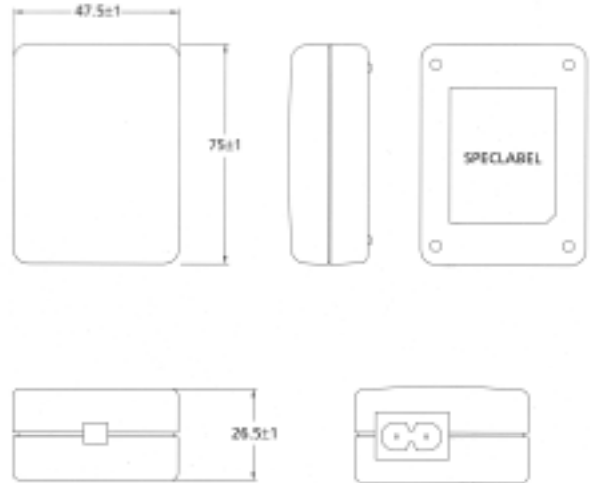

Model	Output		PSE	UL/cUL	TUV/GS	CE	CB	FCC
E/121DA-05	5V	2.5A						
E/121DA-05A	5V	2A						
E/121DA-06	6V	2A						
E/121DA-07	7V	1.75A						
E/121DA-09	9V	1.33A						
E/121DA-10	10V	1.2A						
E/121DA-12	12V	1A						
E/121DA-12A	12.5V	1A						
E/121DA-15	15V	0.8A						
E/121DA-16	16V	0.75A	-					
E/121DA-18	18V	0.67A	-					
E/121DA-20	20V	0.6A	-					
E/121DA-24	24V	0.5A	-					

SPECIFICATIONS

Input	Voltage	AC 90V - 264V Universal full range
	Frequency	47 - 63Hz
	Current	10W=300mA, 12W=600mA
	Leakage Current	<0.25mA
Others	Start up time	<1000mS @ Minimum AC input
	Rise Time	<100mS
	Hold up time	>20mS @ 230Vac / 50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0 ~ 40 ; Storage: -10 ~ +75
	Humidity	Operating: 20% ~ 85%; Storage: 10% ~ 95% (Non Conversing)
MTBF	50K Hours	
Safety	PSE, UL 60950-1, CSA C22.2 No.60950-1, EN 60950-1, IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15 EN 55022, EN61000-3
	EMS	EN 50024 (EN61204-3) EN61000-4

記載仕様は改良や規格更新に伴い予告なく変更する場合がございます。

トキトレーディング株式会社

〒669-1354 兵庫県三田市大畑34-24

Tel: 079-560-7333 Fax: 079-560-7334

Mail: info@toki-t.com HP: http://www.toki-t.com