

## AC-DC 18W


スイッチングACアダプター

### <特徴>

軽量コンパクト  
RoHS指令・WEEE指令対応  
過電圧保護回路搭載(OVP)  
低リップル&ノイズ  
100%バーニン試験済



80.6\*50\*31mm

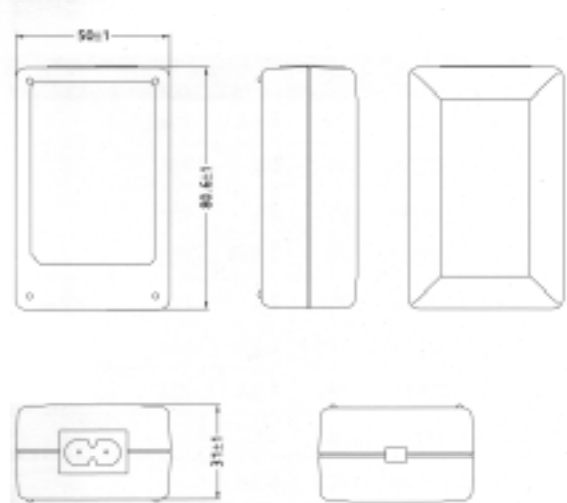

| Model      | Output |       | PSE | UL/cUL | TUV/GS | CE | CB | FCC |
|------------|--------|-------|-----|--------|--------|----|----|-----|
| E/181DA05  | 5V     | 3.6A  |     |        |        |    |    |     |
| E/181DA05A | 5V     | 3A    |     |        |        |    |    |     |
| E/181DA06  | 6V     | 3A    |     |        |        |    |    |     |
| E/181DA07  | 7V     | 2.57A |     |        |        |    |    |     |
| E/181DA09  | 9V     | 2A    |     |        |        |    |    |     |
| E/181DA12  | 12V    | 1.5A  |     |        |        |    |    |     |
| E/181DA15  | 15V    | 1.2A  |     |        |        |    |    |     |
| E/181DA18  | 18V    | 1A    | -   |        |        |    |    |     |
| E/181DA20  | 20V    | 0.9A  | -   |        |        |    |    |     |
| E/181DA24  | 24V    | 0.75A | -   |        |        |    |    |     |

### SPECIFICATIONS

|             |  |   |
|-------------|--|---|
| Input       | Voltage  | AC 90V - 264V Universal full range                        |
|             | Frequency  | 47 - 63Hz   |
|             | Current  | 600mA   |
|             | Leakage Current  | <0.25mA   |
|             | Others   | Start up time   |
| Others      | Rise Time  | <100mS  |
|             | Hold up time   | >20mS @ 230Vac / 50Hz input                               |
|             | Cooling  | Natural Cooling   |
|             | Environment  | Temperature   |
| Environment | Humidity   | Operating: 20% ~ 85%; Storage: 10% ~ 95% (Non Conversing) |
| MTBF        | 50K Hours  |   |
| Safety      | PSE, UL 60950-1, CSA C22.2 No.60950-1, EN 60950-1, IEC 60950-1 |   |
| EMC         | EMI  | FCC CFR 47 PART 15<br>EN 55022, EN61000-3                 |
|             | EMS  | EN 50024 (EN61204-3)                                      |
|             |  | EN61000-4   |

記載仕様は改良や規格更新に伴い予告なく変更する場合がございます。

### トキトレーディング株式会社

〒669-1354 兵庫県三田市大畑34-24

Tel: 079-560-7333 Fax: 079-560-7334

Mail: info@toki-t.com HP: http://www.toki-t.com